

Series UPX-EO, Mobile panels for outdoor use

Event Outdoor

Panels for open-air and outdoor events. 4500 to 5000 nit, tested with wind frame up to 20 m/s.

Pixel pitch	Brightness	Panel
2.9 to 3.9 mm	up to 5000 nit	500 × 500 and more


Like Event Indoor, but for outdoors. Panels 500 × 500 and 500 × 1000 mm, the modules can be replaced from the front and rear.

With wind frame, the wall is TÜV-tested up to wind force 8 (20 m/s). It can be hung up to 15 m, with wind frame up to 10 m.

Wind-resistant. The aluminium frame can be walked on and also serves as a stacking rack.

Curves without gaps. An arc lock closes the joint in curved walls.

Transport. One trolley takes 18 large or 36 small panels.

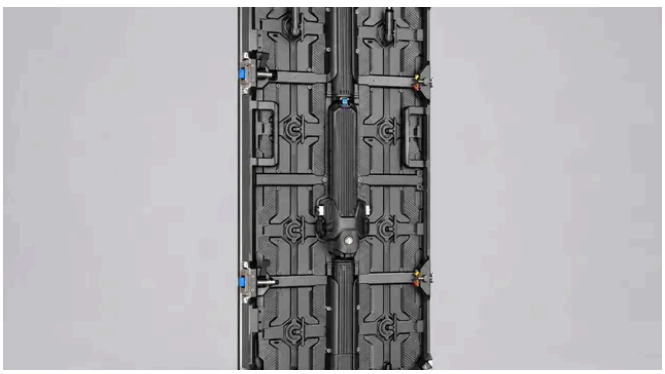



	P2.9	P3.9
Pixel pitch	2.9 mm	3.9 mm
Panel resolution	168 × 168 or 168 × 336 pixels	128 × 128 or 128 × 256 pixels
Brightness	4500 nit	5000 nit (Black LED: 4000 nit)

For all variants

Panel	500 × 500 or 500 × 1000 mm, 74 mm deep
Weight	8.7 or 14 kg, with wind frame 11.1 or 17.5 kg
Material	Die-cast aluminium
Maintenance	Modules from the front and rear, power supply from the rear
Hanging height	up to 15 m, with wind frame up to 10 m

Ultimapix
Scherrer Medien GmbH
Neuwiesstrasse 24
CH-8572 Berg TG

+41 71 511 09 90
info@ultimapix.com
ultimapix.com/en/products/event-outdoor/

Values as specified by the manufacturer, subject to change. Images may differ from the product, image content is an example.